



LTseries LT1564

Two-way Loudspeaker System

The **LT1564** is a two way constant dispersion design for long distance sound reinforcement, The box body is made of fiberglass, conforms to IP56 International standard.

LT1564是一款15"两分音中远程音箱。采用一只15"高效率中低音单元，一只1.4"喉口75芯钛膜高音驱动器，中低音与高音全部采用号角负载设计，箱体采用玻璃纤维与高分子聚合物制作，产品符合IP56国际标准。

FEATURES

- High quality fiberglass enclosure
- High power output
- Accurate 60°×40° constant direction to reduce sound interference and ensure clear sound
- Good used for stadiums, water parks and other outdoor venue types.


产品特点

- 高质量单元配置，耐候玻纤箱体
- 号角负载设计，高音压级输出
- 单元隐藏式安装，适应全天候使用
- 超长品质保证期：品质与信心的保证

适用范围

- 用于中远程语言扩声
- 体育场馆等公共场所
- 广场、主题公园、景区扩声

CONFIGURATION

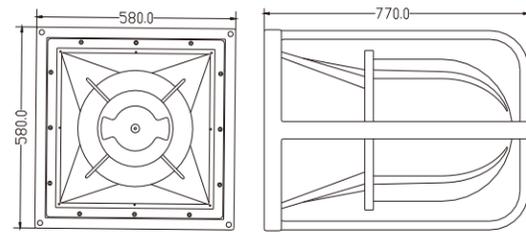

MODEL

FREQUENCY RESPONSE(-3dB)

FREQUENCY RESPONSE(-10dB)

DRIVERS

RATED POWER

SENSITIVITY

MAXIMUM SPL

IMPEDANCE

DISPERSION(-6dB)

CROSSOVER FREQUENCIES

INPUT CONNECTORS

PACKAGE SIZE

NET WEIGHT

GROSS WEIGHT

LT1564

80Hz-18kHz

75Hz-20kHz

1×15"(385mm)/3"voice coil LF

1×1.4"(36mm)/3"voice coil HF

400W RMS,1600W peak

107dB 1watt/1 metre

133dB continuous,139dB peak

8 ohms nominal

60°×40°


1.7kHz passive

2×Speakon NL4

675mm×675mm×872mm

36 kg/pc

41 kg/pc

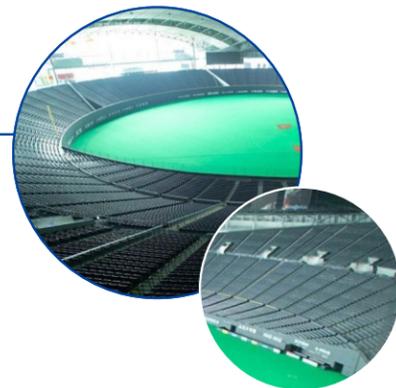

ES series

多功能工程音箱

